



FACILITIES MANAGEMENT
Facilities Planning and Construction Department

DATE: Nov. 9, 2016

CONSTRUCTION ALERT

Report No. 12

CONCERNING IMMINENT CONSTRUCTION ACTIVITY

35kV Ductbank Project

ITEMS OF INTEREST: Construction activity will begin in the northbound lane of Alderman Road starting Monday, Nov. 14. Faulconer Construction will close 150' of the northbound lane of Alderman Road to install an electrical ductbank. Construction will start just north of George Welsh Way. Faulconer will work in 150' sections of road at a time, moving north towards Pratt Drive. Construction in Alderman Road will continue for the next several months.


IMMINENT ACTIVITY: Construction activity will begin in the northbound lane of Alderman Road starting on Monday, Nov. 14.

BACKGROUND: The 35kV Ductbank Project will install 2.75 miles of 35 kV electrical ductbank to provide a dedicated underground power feed to the University of Virginia. The new ductbank will connect the existing Sherwood, Alderman, and Cavalier substations through a combination of two, four, and six way underground ductbanks consisting of 8" PVC conduits encased in concrete. Large concrete electrical vaults will be installed at approximately 500 foot intervals along the ductbank, the largest vaults measure 9'x9'x17' outside dimensions. The installation of the ductbank requires road closures in several areas.

INTERIM ROUTES: Flaggers will be in place to direct traffic during the day and traffic lights will be in place at night.

ISSUED BY: Dave Fiero, Project Manager/Senior Construction Administration Manager, FP&C, DFiero@virginia.edu, 434-297-7630, c 434.872-1469

Caitlin Murtaugh, Project Coordinator, FP&C, cm8nf@virginia.edu, 434.982.2956, c 434.906.3075

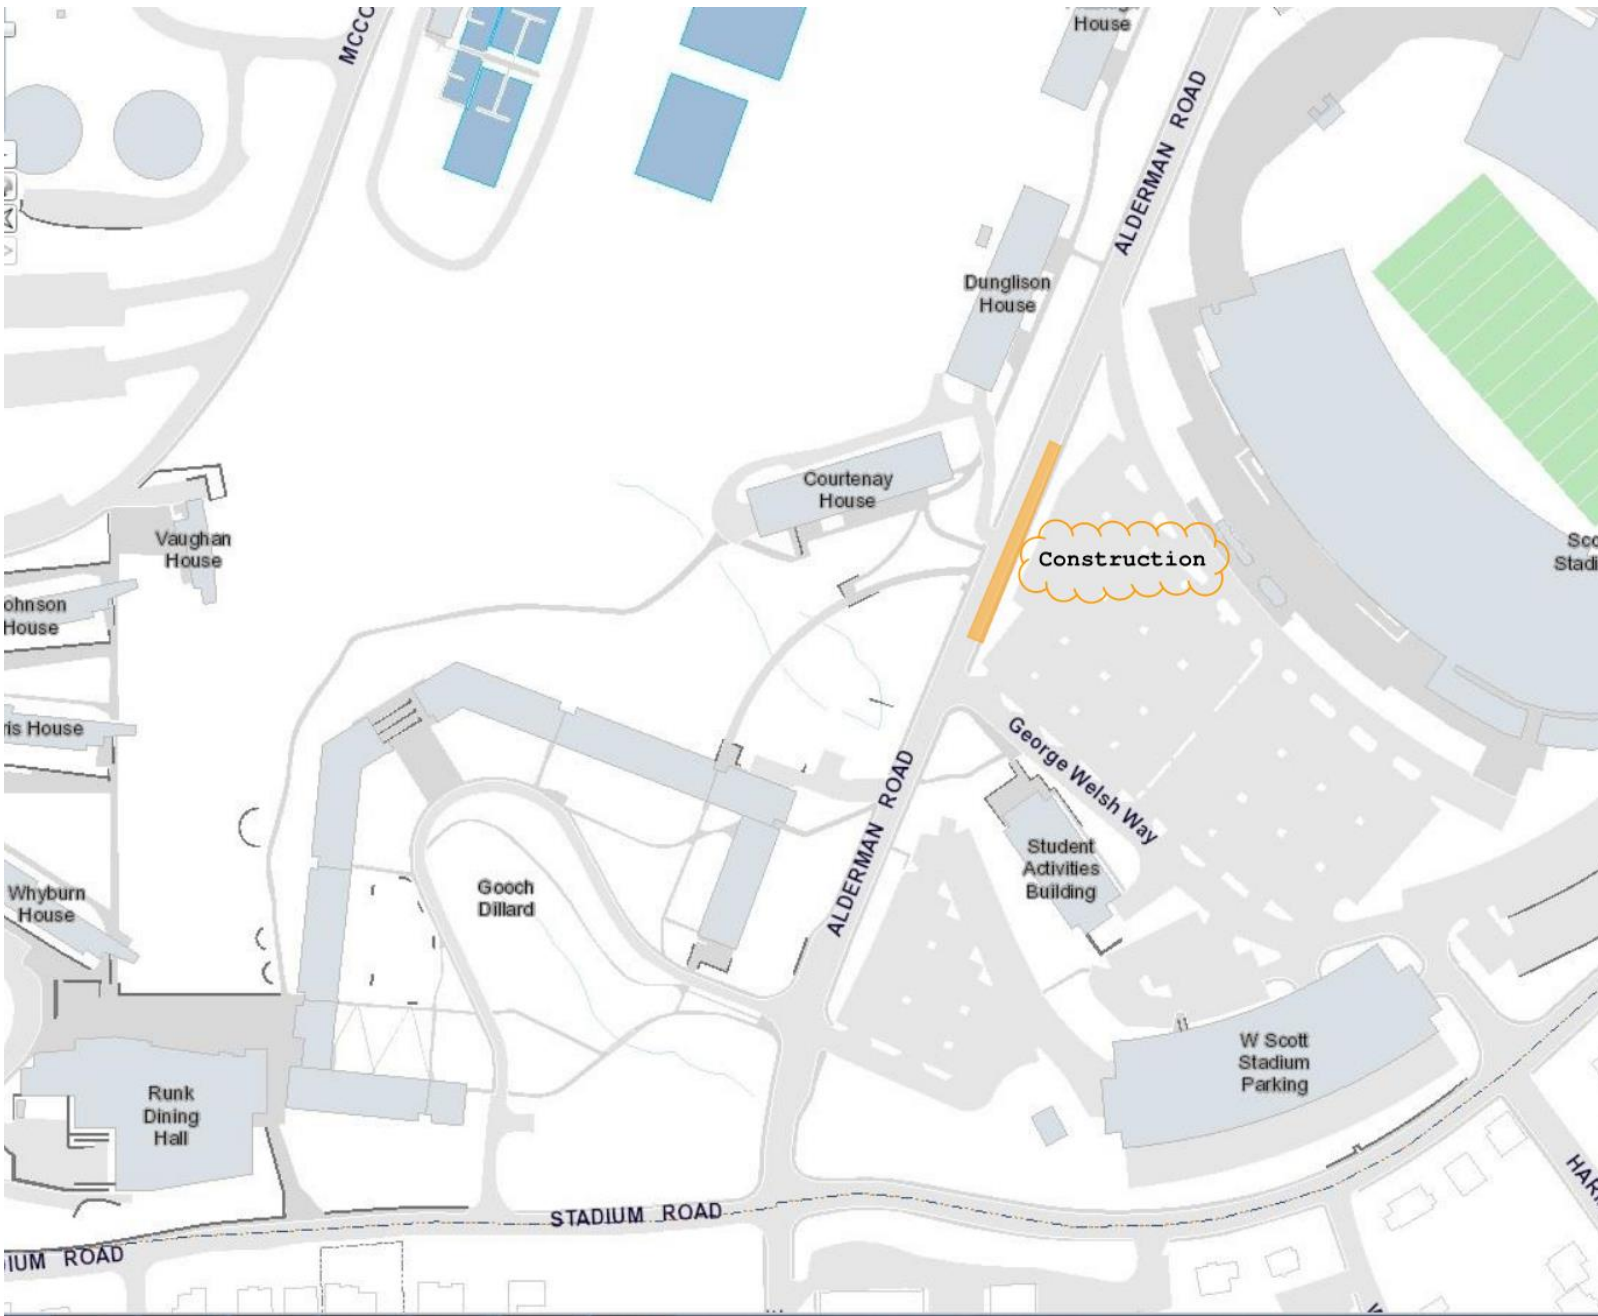

END OF ALERT