



FACILITIES MANAGEMENT
Facilities Planning and Construction Department

DATE: Dec. 1, 2016

CONSTRUCTION ALERT

Report No. 14

CONCERNING IMMINENT CONSTRUCTION ACTIVITY

35kV Ductbank Project

ITEMS OF INTEREST: A section of the northbound lane of Alderman Road will be closed in front Whitehead Road starting Thursday, Dec. 8 and will re-open Tuesday, Dec. 13. There will be flagmen allowing alternating traffic in each direction. Traffic will not be able to turn right from Whitehead Road onto Alderman.


IMMINENT ACTIVITY: There will be construction activity in the northbound lane of Alderman Road for the next several weeks.

BACKGROUND: The 35kV Ductbank Project will install 2.75 miles of 35 kV electrical ductbank to provide a dedicated underground power feed to the University of Virginia. The new ductbank will connect the existing Sherwood, Alderman, and Cavalier substations through a combination of two, four, and six way underground ductbanks consisting of 8" PVC conduits encased in concrete. Large concrete electrical vaults will be installed at approximately 500 foot intervals along the ductbank, the largest vaults measure 9'x9'x17' outside dimensions. The installation of the ductbank requires road closures in several areas.

INTERIM ROUTES: Alternate routes will be established.

ISSUED BY: Dave Fiero, Project Manager/Senior Construction Administration Manager, FP&C, DFiero@virginia.edu, 434-297-7630, c 434.872-1469

Caitlin Murtaugh, Project Coordinator, FP&C, cm8nf@virginia.edu, 434.982.2956, c 434.906.3075

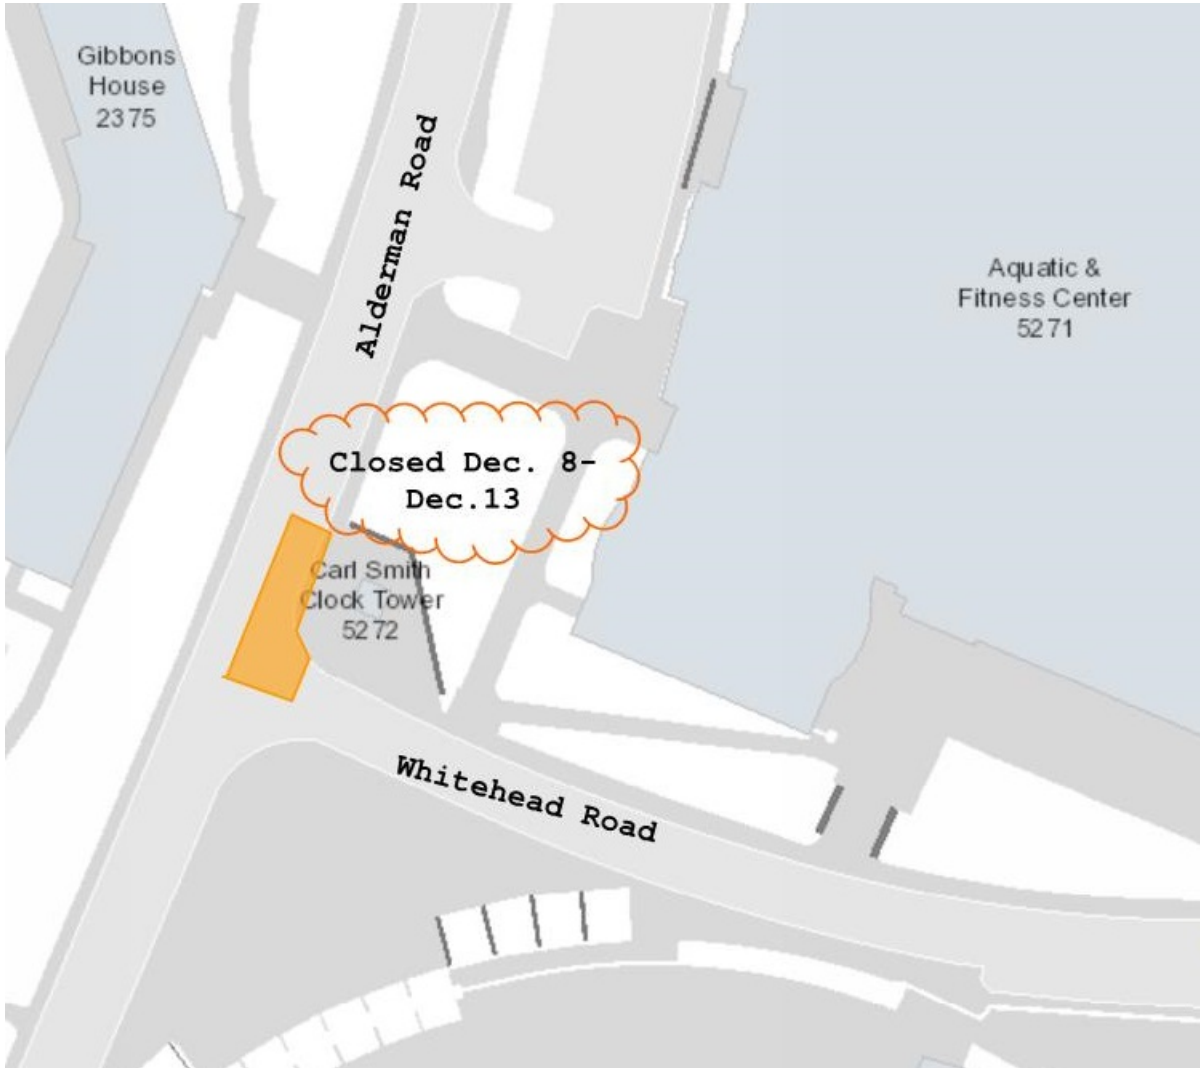

END OF ALERT