



FACILITIES MANAGEMENT
Facilities Planning and Construction Department

DATE: Dec. 13, 2016

CONSTRUCTION ALERT

Report No. 16

CONCERNING IMMINENT CONSTRUCTION ACTIVITY


35kV Ductbank Project

ITEMS OF INTEREST: A section of the northbound lane of Alderman Road will be closed from Dec. 19 to Jan. 3. The lane closure will begin at the Alderman/Stadium intersection and will end at the Alderman/George Welsh intersection. The southbound lane of Alderman Road will remain open.

BACKGROUND: The 35kV Ductbank Project will install 2.75 miles of 35 kV electrical ductbank to provide a dedicated underground power feed to the University of Virginia. The new ductbank will connect the existing Sherwood, Alderman, and Cavalier substations through a combination of two, four, and six way underground ductbanks consisting of 8" PVC conduits encased in concrete. Large concrete electrical vaults will be installed at approximately 500 foot intervals along the ductbank, the largest vaults measure 9'x9'x17' outside dimensions. The installation of the ductbank requires road closures in several areas.

INTERIM ROUTES: A marked detour will direct northbound traffic to Stadium Road and Whitehead Road.

ISSUED BY: Dave Fiero, Project Manager/Senior Construction Administration Manager, FP&C, DFiero@virginia.edu, 434-297-7630, c 434.872-1469
Caitlin Murtaugh, Project Coordinator, FP&C, cm8nf@virginia.edu, 434.982.2956, c 434.906.3075

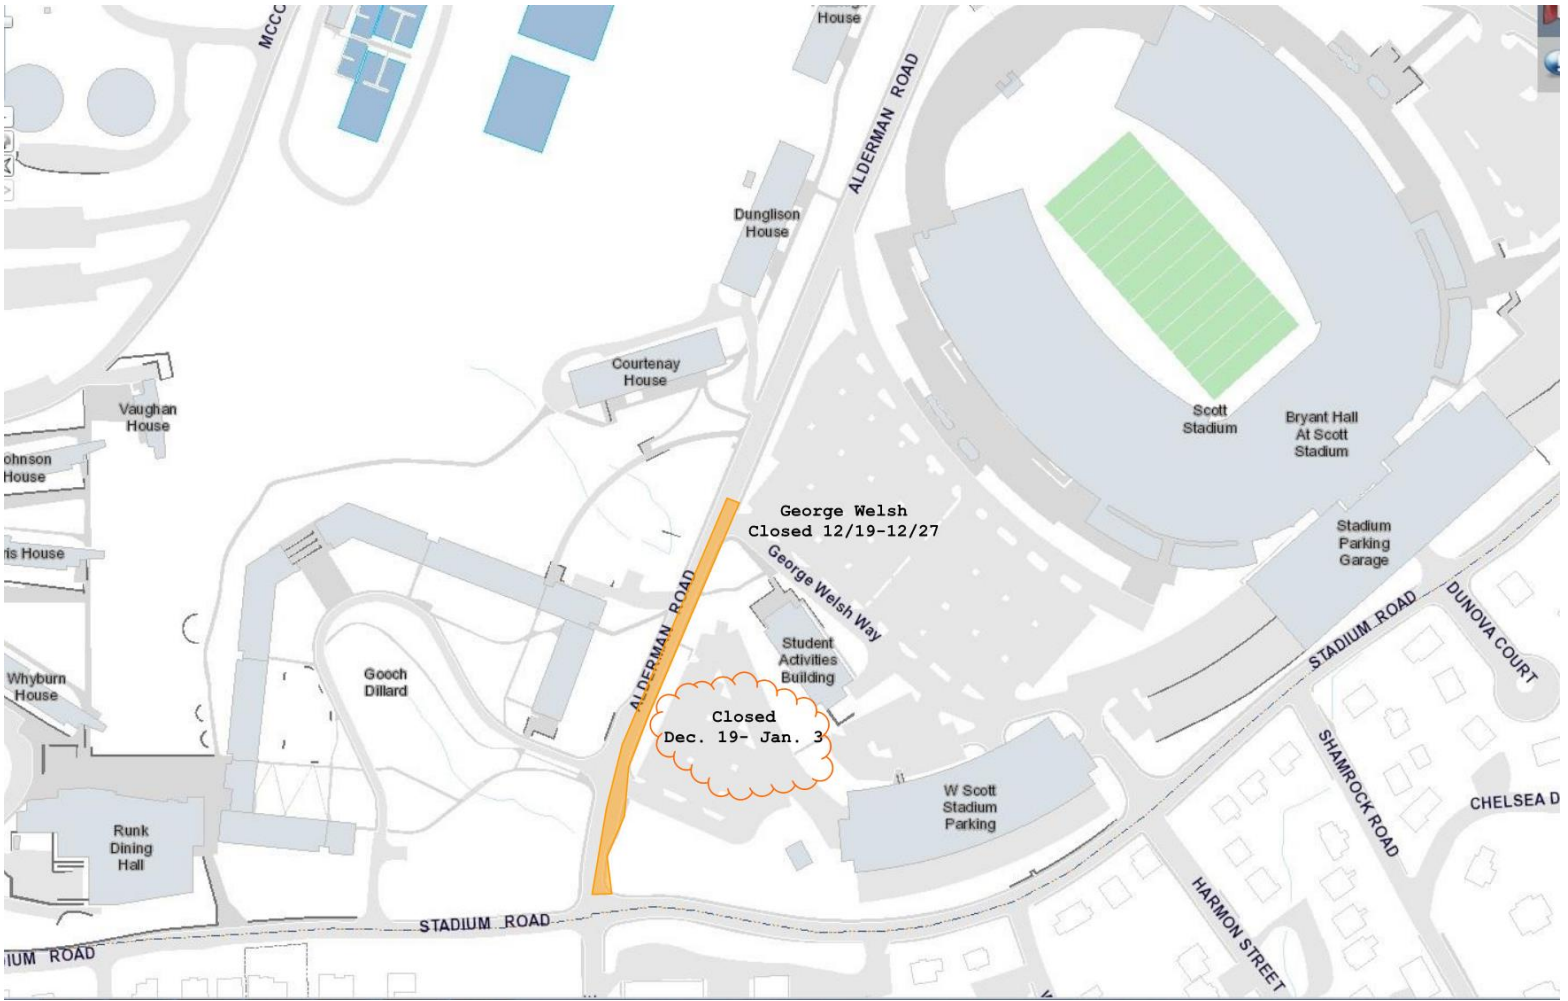

END OF ALERT