



FACILITIES MANAGEMENT  
Facilities Planning and Construction Department

DATE: Jan. 4, 2016

## **CONSTRUCTION ALERT**

Report No. 20

### **CONCERNING IMMINENT CONSTRUCTION ACTIVITY UPDATE**

## **35kV Ductbank Project**


**ITEMS OF INTEREST:** A section of Crispell Drive between Monroe Lane and Jeanette Lancaster Way will be closed from ~~Jan. 11 to Jan. 19~~ Jan. 9 to Jan. 16. We will be installing an electrical vault and ductbank in the center of Crispell Drive.

**BACKGROUND:** The 35kV Ductbank Project will install 2.75 miles of 35 kV electrical ductbank to provide a dedicated underground power feed to the University of Virginia. The new ductbank will connect the existing Sherwood, Alderman, and Cavalier substations through a combination of two, four, and six way underground ductbanks consisting of 8" PVC conduits encased in concrete. Large concrete electrical vaults will be installed at approximately 500 foot intervals along the ductbank, the largest vaults measure 9'x9'x17' outside dimensions. The installation of the ductbank requires road closures in several areas.

**INTERIM ROUTES:** There signage directing traffic to alternate routes.

**ISSUED BY:** Dave Fiero, Project Manager/Senior Construction Administration Manager, FP&C, [DFiero@virginia.edu](mailto:DFiero@virginia.edu), 434-297-7630, c 434.872-1469

Caitlin Murtaugh, Project Coordinator, FP&C, [cm8nf@virginia.edu](mailto:cm8nf@virginia.edu), 434.982.2956, c 434.906.3075

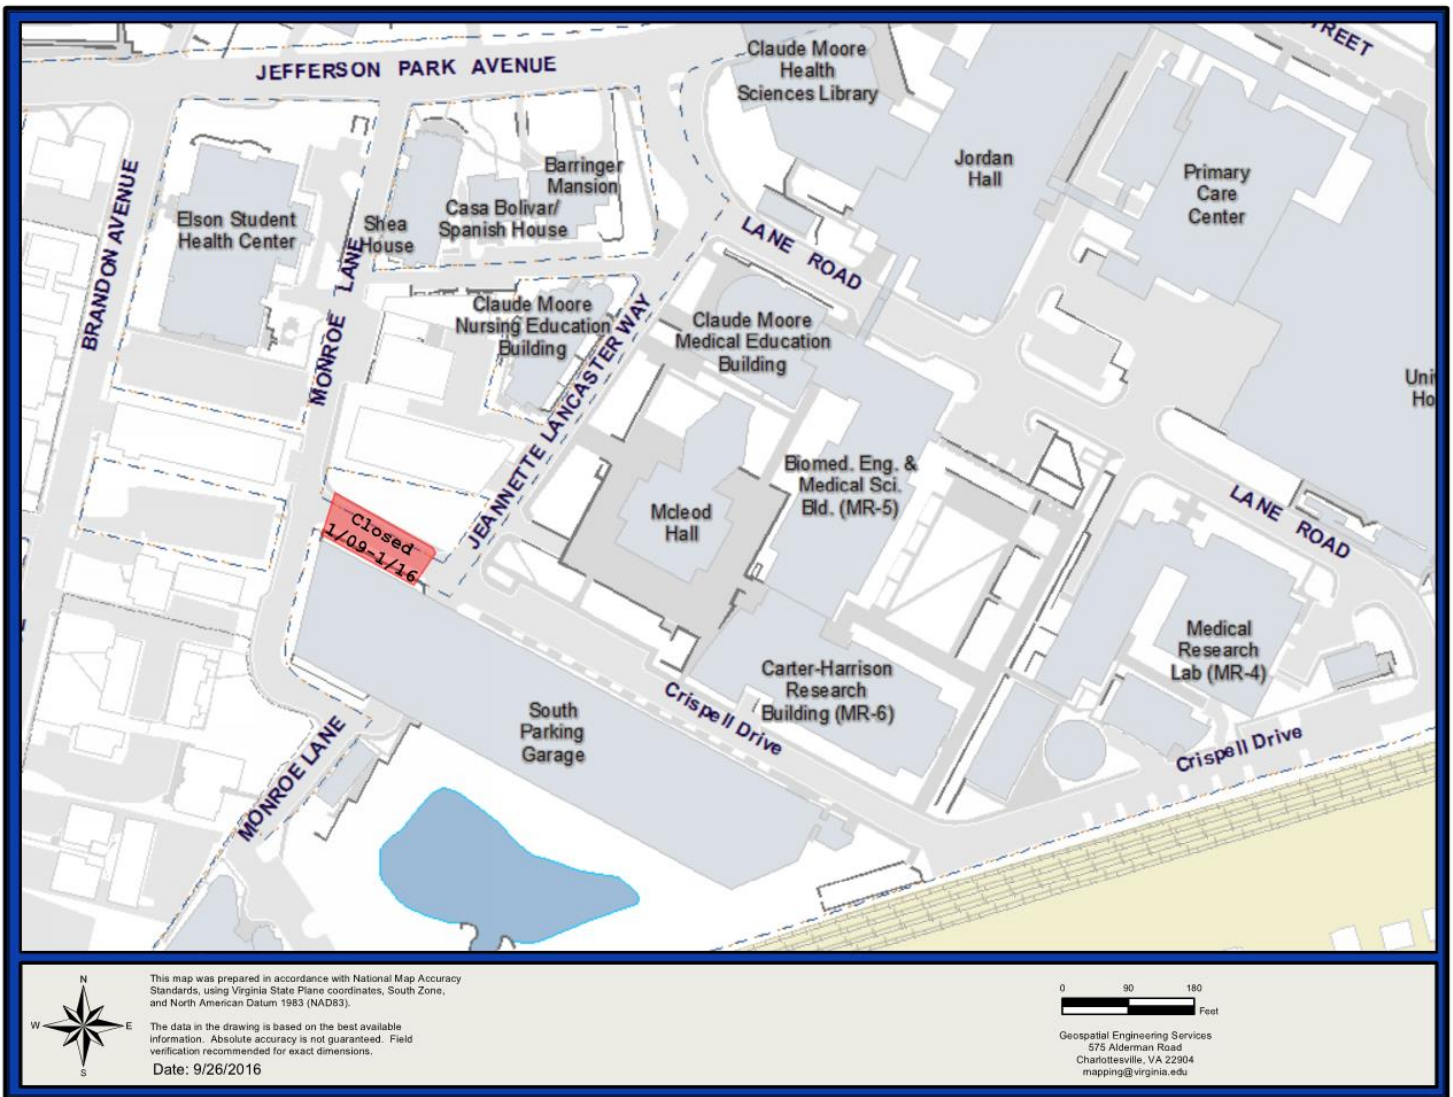

END OF ALERT