



FACILITIES MANAGEMENT
Facilities Planning and Construction Department

DATE: July 10, 2017

CONSTRUCTION ALERT

Report No. 36


CONCERNING IMMINENT CONSTRUCTION ACTIVITY

35kV Ductbank Project Update

ITEMS OF INTEREST: A section of Pratt Drive and Alderman Road will be closed on July 18, 2017 to accommodate the installation of a new utility pole. The area will be closed from 7:30am to 3:30pm. Flagmen will be on-site to direct traffic. Two-way traffic will be maintained in Alderman Road.

BACKGROUND: The 35kV Ductbank Project will install 2.75 miles of 35 kV electrical ductbank to provide a dedicated underground power feed to the University of Virginia. The new ductbank will connect the existing Sherwood, Alderman, and Cavalier substations through a combination of two, four, and six way underground ductbanks consisting of 8" PVC conduits encased in concrete. Large concrete electrical vaults will be installed at approximately 500 foot intervals along the ductbank, the largest vaults measure 9'x9'x17' outside dimensions. The installation of the ductbank requires road closures in several areas.

ISSUED BY: Dave Fiero, Project Manager/Senior Construction Administration Manager, FP&C, DFiero@virginia.edu, 434-297-7630, c 434.872-1469
Caitlin Murtaugh, Project Coordinator, FP&C, cm8nf@virginia.edu, 434.982.2956, c 434.906.3075

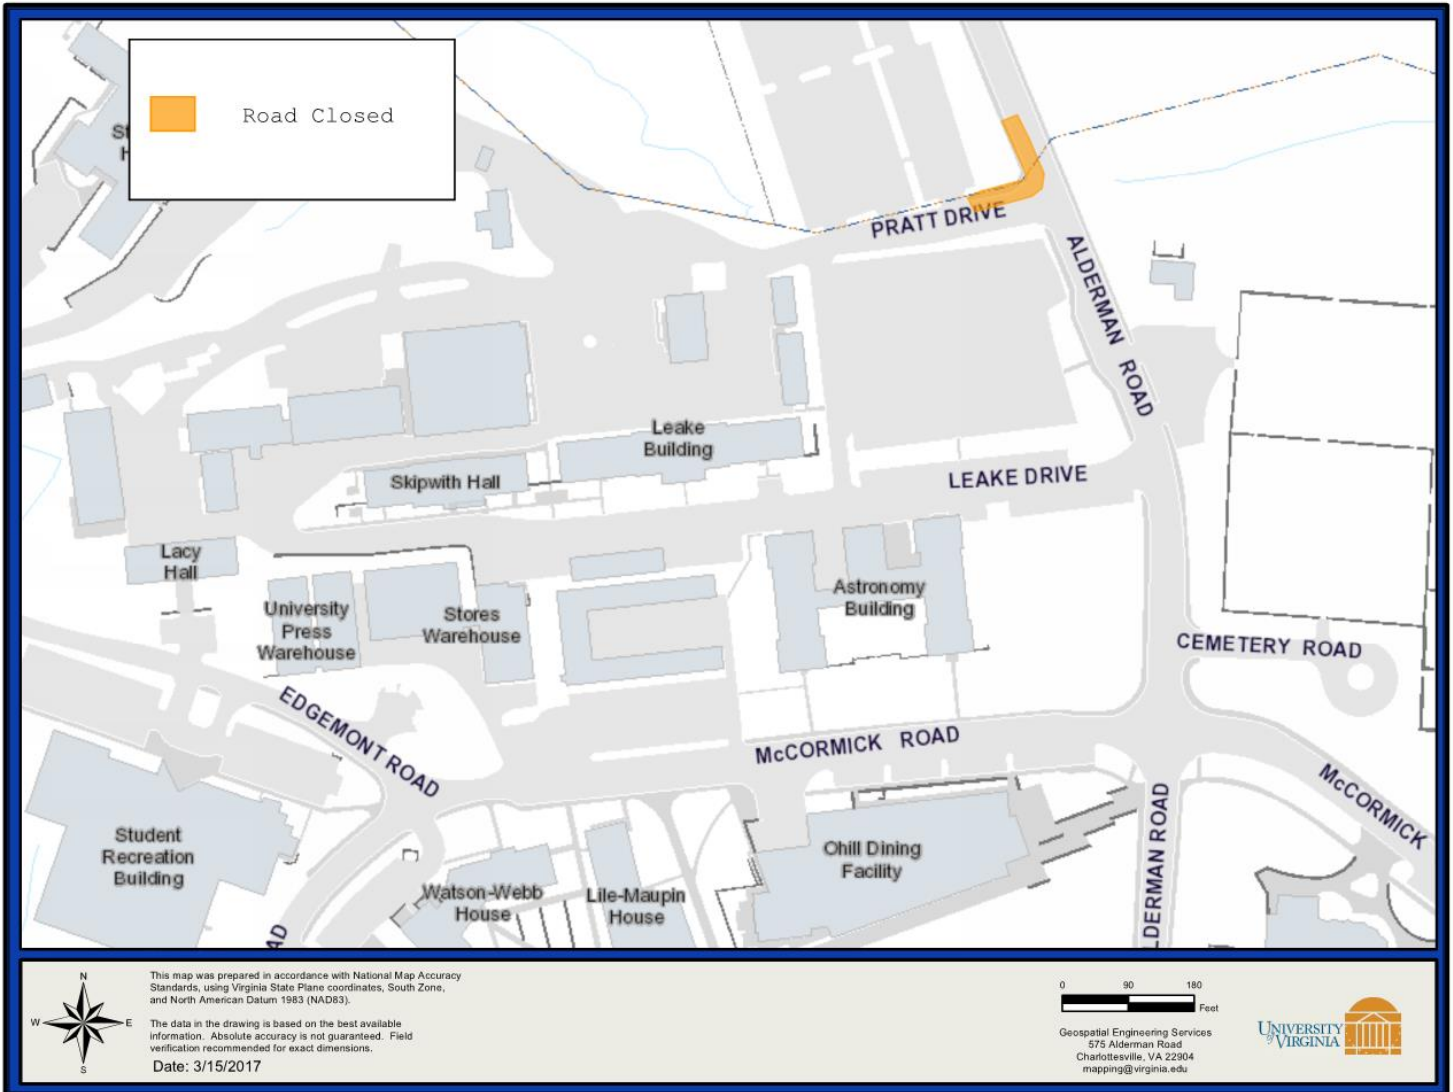

END OF ALERT